



Solar inverter

UNO-DM-5.0- TL-PLUS-Q

The UNO-DM-TL-PLUS-Q single-phase inverter family, with power ratings 5.0 kW, is the optimal solution for residential installations.

5.0 kW

One size fits all

The design wraps FIMER’s quality and engineering into a light-weight and compact package thanks to technological choices optimized for installations with different orientation.

All power ratings share the same overall volume, allowing higher performance in a minimum space, and feature dual Maximum Power Point Trackers.

Easy to install, fast to commission

The presence of Plug and Play connectors, both on the DC and AC side, as well as the wireless communication, enable a simple, fast and safe installation without the need of opening the front cover of the inverter.

The featured easy commissioning routine removes the need for a long configuration process, resulting in lower installation time and costs.

Improved user experience thanks to the build in User Interface (UI) which enables access to features such as advanced inverter configuration settings, dynamic feed-in control and load manager, from any WLAN enabled device (smartphone, tablet or PC).

Smart capabilities

The embedded logging capabilities and direct transferring of the data to Internet (via Ethernet or WLAN) allow customers to enjoy the whole Aurora Vision remote monitoring experience.

The advanced communication interfaces (WLAN, Ethernet, RS485) combined with an efficient Modbus (RTU/TCP) communication protocol, Sunspec compliant, allow the inverter to be easily integrated within any smart environment and with third party monitoring and control systems. A complete set of control functions with the embedded efficient algorithm, enabling dynamic control of the feed-in (i.e. zero injection), make the inverter suitable for worldwide applications in compliance with regulatory norms and needs of the utilities.

Energy Viewer


This new tool allows residential customers to remotely monitor the performance of their own solar plant and provides all information necessary to increase energy self-reliance and self-sufficiency.

Highlights

- Wireless access to the embedded Web User Interface
- Easy commissioning capability
- Future-proof with embedded connectivity for smart building and smart grid integration
- Dynamic feed-in control (for instance “zero injection”)
- Remote firmware upgrade for inverter and components
- Modbus TCP/RTU Sunspec compliant
- Lifetime free of charge access to Aurora Vision

Technical data and types	
Type code	UNO-DM-5.0-TL-PLUS-Q
Input side	
Absolute maximum DC input voltage ($V_{max,abs}$)	600 V
Start-up DC input voltage (V_{start})	200 V (adj. 120...350 V)
Operating DC input voltage range ($V_{dcmin}...V_{dcmax}$)	0.7 x V_{start} ...580 V (min 90 V)
Rated DC input voltage (V_{dcr})	360 V
Rated DC input power (P_{dcr})	5150 W
Number of independent MPPT	2
Maximum DC input power for each MPPT ($P_{MPPTmax}$)	3500 W
DC input voltage range with parallel configuration of MPPT at P_{acr}	170...480 V
DC power limitation with parallel configuration of MPPT P_{acr}	Linear derating from Max to Null [480V≤ V_{MPPT} ≤580V] On MPPT 1: 3500 W [185 V≤ V_{MPPT} ≤480 V] On MPPT 2: P_{acr} ~3500 W [145 V≤ V_{MPPT} ≤480 V] or 3500 W (305 V≤ V_{MPPT} ≤480 V) with no power on MPPT1
DC power limitation for each MPPT with independent configuration of MPPT at P_{acr} , max unbalance example	30.5/19-11.5 A (MPPT 1 - MPPT 2)
Maximum DC input current (I_{dcmax}) / for each MPPT ($I_{MPPTmax}$)	22.0 A
Maximum input short circuit current for each MPPT	22.0 A
Number of DC input pairs for each MPPT	1
DC connection type ³⁾	Quick Fit PV Connector
Input protection	
Reverse polarity protection	Yes, from limited current source
Input over voltage protection for each MPPT-varistor	Yes
Photovoltaic array isolation control	According to local standard
DC switch rating for each MPPT (version with DC switch)	25 A / 600 V
Output side	
AC grid connection type	Single-phase
Rated AC power (P_{acr} @ $\cos\phi=1$)	5000 W
Maximum AC output power (P_{acmax} @ $\cos\phi=1$)	5000 W
Maximum apparent power (S_{max})	5000 VA
Rated AC grid voltage ($V_{ac,r}$)	230 V
AC voltage range ³⁾	180...264 V
Maximum AC output current ($I_{ac,max}$)	22.0 A
Contributory fault current	24.0 A
Rated output frequency (f_i) ⁴⁾	50/60 Hz
Output frequency range ($f_{min}...f_{max}$) ⁴⁾	47...53/57...63 Hz
Nominal power factor and adjustable range	> 0.995, adj. ± 0.1 - 1 (over/under excited)
Total current harmonic distortion	< 3%
AC connection type	Female connector from panel
Output protection	
Anti-islanding protection	According to local standard
Maximum external AC overcurrent protection	32.0 A
Output overvoltage protection - varistor	2 (L - N / L - PE)

UNO-DM-5.0-TL-PLUS-Q string inverter block diagram

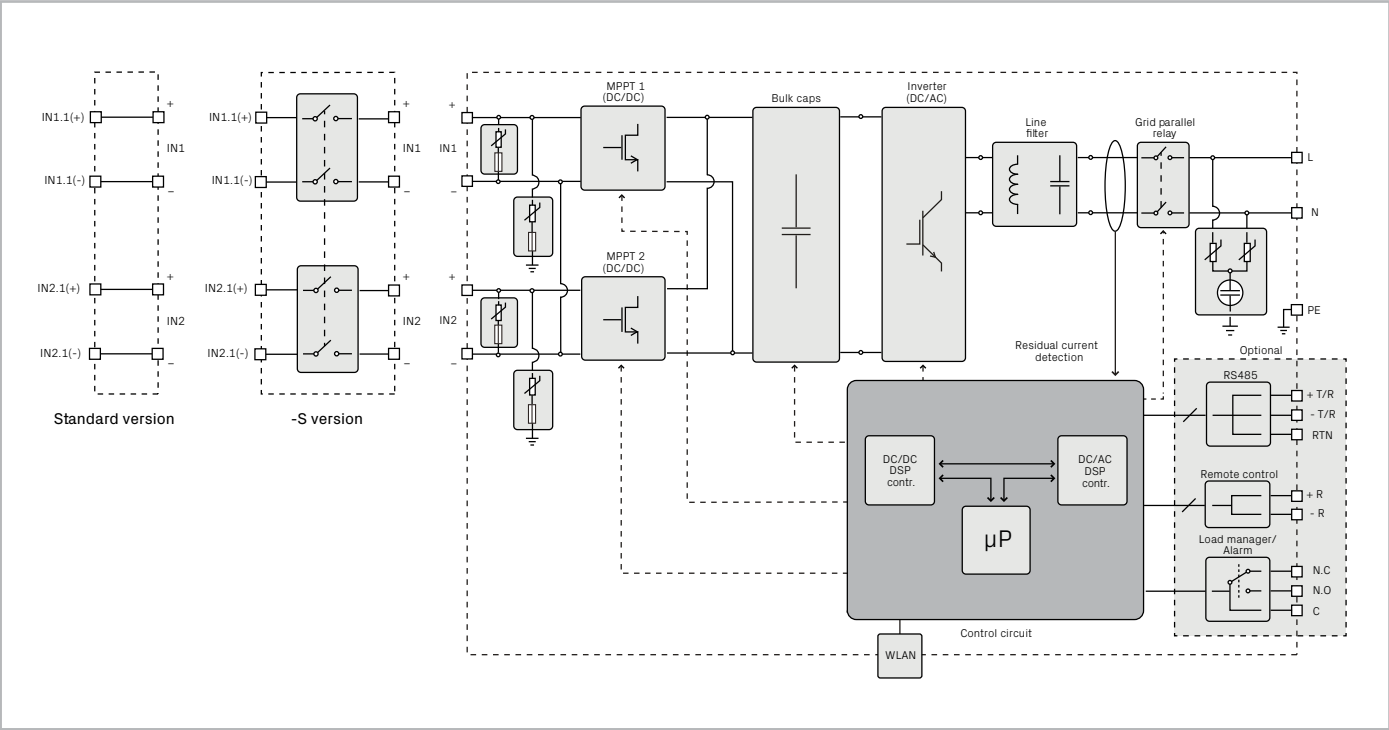

Technical data and types

Type code	UNO-DM-5.0-TL-PLUS-Q
Operating performance	
Maximum efficiency (η_{max})	97.4%
Weighted efficiency (EURO/CEC)	97.0% / -
Feed in power threshold	8 W
Night consumption	<0.4 W
Embedded communication	
Communication interface ⁵⁾	Wireless
Embedded communication protocol	ModBus TCP (SunSpec)
Commissioning tool	Web User Interface, Aurora Manager Lite
Monitoring	Plant Portfolio Manager, Plant Viewer, Plant Viewer for Mobile, Energy Viewer
Optional board UNO-DM-COM kit	
Optional communication interface	RS485 (use with meter for dynamic feed-in control), Alarm/Load manager relay, Remote ON/OFF
Optional communication protocol	ModBus RTU (SunSpec), Aurora Protocol
Optional board UNO-DM-PLUS Ethernet COM kit	
Optional communication interface	Ethernet, RS485 (use with meter for dynamic feed-in control), Alarm/Load manager relay, Remote ON/OFF
Optional communication protocol	ModBus TCP (SunSpec), ModBus RTU (SunSpec), Aurora Protocol
Environmental	
Ambient temperature range	-25...+60°C /-13...140°F with derating above 45°C/113°F
Relative humidity	0...100 % condensing
Maximum operating altitude	2000 m / 6560 ft (without derating)
Physical	
Environmental protection rating	IP 65
Cooling	Natural
Dimension (H x W x D)	553 x 418 x 175 mm / 21.8" x 16.5" x 6.9"
Weight	15 kg / 33 lbs
Mounting system	Wall bracket
Safety	
Isolation level	Transformerless
Marking	CE , RCM

Safety and EMC standard IEC/EN 62109-1, IEC/EN 62109-2, AS/NZS 4777.2, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-11, EN 61000-3-12

Grid standard (check your sales channel for availability ⁶⁾) CEI 0-21, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G83/2, G59/3, G98-1, G99-1, RD 413, ITC-BT-40, AS/NZS 4777.2, C10/11, IEC 61727, IEC 62116

Available products variants

Standard	UNO-DM-5.0-TL-PLUS-B-QU
With DC switch	UNO-DM-5.0-TL-PLUS-SB-QU

- 1) "Refer to the document "String inverter – Product Manual appendix" available at www.fimer.com to know the brand and the model of the quick fit connector"
- 2) For UK G83/2 and G98-1 settings, maximum output current limited to 16 A
- 3) The AC voltage range may vary depending on specific country grid standard

- 4) The Frequency range may vary depending on specific country grid standard: CE is valid for 50Hz only
- 5) As per IEEE 802.11 b/g/n standard
- 6) Further grid standard will be added, please refer to FIMER's Solar page for further details

Remark. Features not specifically listed in the present data sheet are not included in the product



For more information please contact your local FIMER representative or visit:

fimer.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. FIMER does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of FIMER. Copyright© 2022 FIMER. All rights reserved.

